



Arctic Manufacturing Ltd.


3323 Hart Highway, Prince George, B.C. V2K 1M8

ph: (250) 962-9631

fx: (250) 962-7500

www.arcticmfg.com

LT-24tr-89 Tridem Pole Trailer

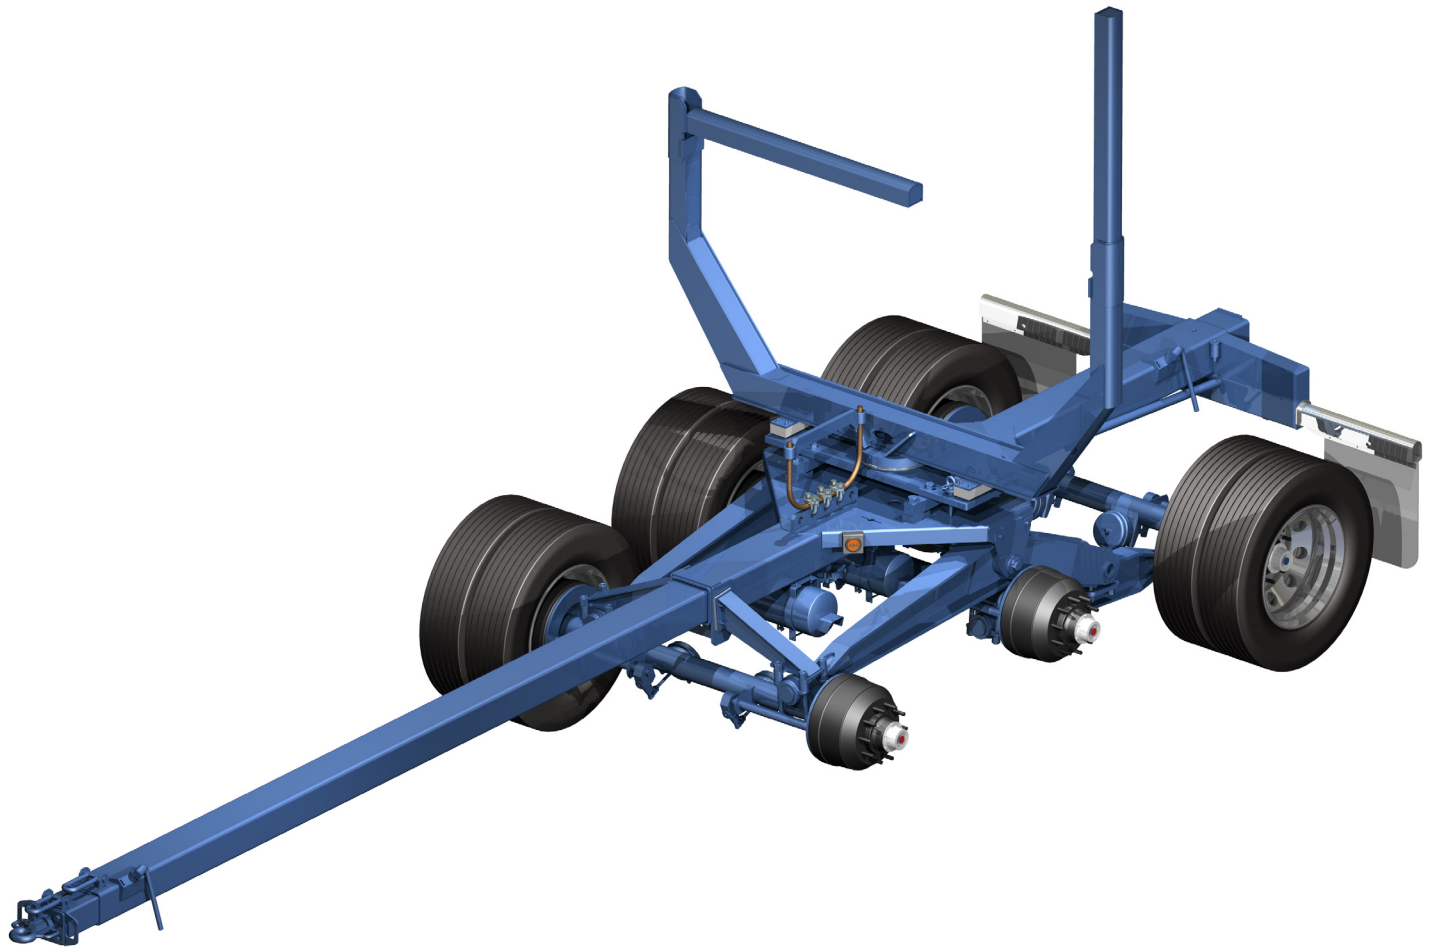

- Chassis:** QT-100 Deck and Inboard Legs. One Piece Top Deck Plate with One Piece Front and Rear Cross Inboard Legs. Low Deck Height. 60" x 89" Track Axles. Spring Loaded Mud-Flap Hangers with HD Low-Temp Mud-Flaps.
- Suspension:** "Arctic" Walking beam with Urethane Bushings Through-out. 2-Piece End Caps with 1" "U"-Bolts for Easy Bushing Maintenance. Front Suspension/Reach Guides for Reduced Lateral Load on Suspension Bushings.
- Axle:** Dana D22FC-89" track, 3/4" wall with weld-on spiders. Bolt-On Spiders optional.
- Hubs:** 10-Stud cast hub pilot hubs, with long studs for dual aluminum wheels.
- Drums:** 10 stud cast out-board type 16 1/2" x 7" brake drums.

- Brakes:** CM29 "Q-Type" (25,000lb OEM certifiable G.A.W.R.), enclosed air-ride camshafts with HD snap-rings, Haldex automatic slack adjusters. #30 service brakes Haldex 2S/1M Anti-Lock Brake System on each unit.
- Tires:** Michelin XZY-3 11R24.5 load-range (H).
- Rims:** Motorwheel/Borlem Steel Bud Wheels - painted White 8.25 x 24.5 rims.
- Bunks:** 8'-6" Trip-Type or Light Weight "U"-Bunk. 9'-6", 10 and 10'-6" Bunks in Standard Height and Low-Profile Height as Options.
- Scales:** Vulcan V-400 with VSL Electronics Standard.
- Air:** "X" maxi brake air system.
- Reach:** 30' - 9" x 7" x 3/8" wall with 60" Nylon Bushed Compansator. Two and Three Stages.
- Electrical:** C.M.V.S.S. Compliance lighting system. Sealed shock resistant lexan tail and clearance/marker lights. Sealed Bobtail receptacles and plugs for all exposed electrical harness. LED tail and marker lights avail able as an option.
- Paint:** DuPont Anti-corrosive zinc high-build epoxy primer with DuPont Imron epoxy single stage two part, same color on frame, axle, hubs. Color: Black. C.M.V.S.S. compliance reflective tape. Media blasted prior to priming/painting.
- Rating:** 33,969 kg G.V.W.R.
- Options:** Light-Weight Hub and Bi-Metal Drums.
Aloca Aluminum Wheels available as an option, as well as polished.
11R22.5 Wheel Option.
Various Bunk, Saucer, Bolster, Stake and Electronic Scales.

